

MariX, an advanced MHz-class repetition rate X-ray source for linear regime time-resolved spectroscopy and photon scattering

L. Serafini¹, M.P. Abbraccio², A. Bacci¹, A. Bellandi³, M. Bertucci¹, M. Bolognesi², A. Bosotti¹, F. Broggi¹, R. Calandrino⁴, F. Camera^{2,1}, F. Canella², S. Capra^{2,1}, P. Cardarelli^{5,6}, M. Carrara⁷, K. Cassou⁸, A. Castoldi^{9,1}, R. Castriconi⁴, G.M. Cattaneo⁴, S. Cialdi^{2,1}, A. Cianchi¹⁰, N. Coluccelli⁹, C. Curatolo¹¹, A. Del Vecchio⁴, S. Di Mitri¹², I. Drebot¹, K. Dupraz⁸, A. Esposito¹³, L. Faillace¹, M. Ferrario¹³, C. Fiorini^{9,1}, G. Galzerano^{9,14}, M. Gambaccini^{5,6}, G. Ghiringhelli⁹, D. Giannotti¹, D. Giove¹, F. Groppi^{2,1}, C. Guazzoni^{9,1}, P. Laporta⁹, S. Leoni^{2,1}, A. Loria⁴, P. Mangili⁴, A. Martens⁸, T. Mazza¹⁵, Z. Mazzotta¹⁶, C. Meroni¹, G. Mettivier¹⁷, P. Michelato¹, L. Monaco¹, S. Morante¹⁰, M. Moretti¹⁰, D. Nutarelli⁸, S. Olivares², G. Onida², M. Opromolla^{2,1}, C. Pagani^{2,1}, R. Paparella¹, M.G.A. Paris^{2,1}, B. Paroli^{2,1}, G. Paternò⁶, C. Paulin², L. Perini^{2,1}, M. Petrarca¹⁸, V. Petrillo^{2,1,*}, E. Pinotti⁹, P. Piseri^{2,1}, M. Potenza², F. Prelz¹, A. Pullia^{2,1}, E. Puppini^{9,1}, F. Ragusa^{2,1}, R. Ramponi^{9,1}, M. Romè^{2,1}, M. Rossetti Conti¹, A.R. Rossi¹, M. Ruijter^{18,1}, P. Russo¹⁷, S. Samsam^{19,1}, A. Sarno¹⁷, D. Sertore¹, M. Sorbi^{2,1}, B. Spataro¹³, M. Statera¹, F. Stellato¹⁰, E. Suerra², A. Tagliaferri⁹, A. Taibi^{5,6}, V. Torri¹, G. Turchetti²⁰, C. Vaccarezza¹³, R. Valdagni⁷, A. Vanzulli^{2,21}, F. Zomer⁸ and G. Rossi².

¹INFN - Sezione di Milano, Via Celoria 16, 20133 Milano and LASA, Via F. Cervi 201, 20090 Segrate (MI), Italy

²Università degli Studi di Milano, Via Celoria, 16 20133 Milano, Italy

³DESY, Notkestrasse 85, 22603 Hamburg, Germany

⁴Istituto di Ricovero e Cura a Carattere Scientifico Ospedale San Raffaele, Via Olgettina 60, 20132 Milano, Italy

⁵Università di Ferrara, Via Saragat, 1 44122 Ferrara, Italy

⁶INFN - Sezione di Ferrara, Via Saragat, 1 44122 Ferrara, Italy

⁷Istituto Nazionale dei Tumori, Via Giacomo Venezian, 1 - 20133 Milano, Italy

⁸LAL, Université Paris-Sud, CNRS/IN2P3, Université Paris-Saclay, 91898 Orsay, France

⁹Politecnico di Milano, Piazza Leonardo da Vinci, 32 20133 Milano, Italy

¹⁰Università degli Studi di Roma Tor Vergata and INFN,

Via della Ricerca Scientifica, 1 00133 Roma, Italy

¹¹INFN - Sezione di Padova, Via Marzolo, 8 - 35131 Padova, Italy

¹²Elettra - Sincrotrone Trieste, 34149 Basovizza, Trieste, Italy

¹³INFN - Laboratori Nazionali di Frascati, Via Enrico Fermi, 40 00044 Frascati (RM), Italy

¹⁴Istituto di Fotonica e Nanotecnologie, CNR, Piazza Leonardo da Vinci, 32 20133 Milano, Italy

¹⁵European X-Ray Free Electron Laser Facility GmbH, Holzkoppel, 4 - 22869 Schenefeld, Germany

¹⁶LULI (CNRS, Ecole Polytechnique, CEA, UPMC), 91190 Saint Aubin, France

¹⁷Università degli Studi di Napoli 'Federico II', Dipartimento di Fisica

'E. Pancini' and INFN Sez. Napoli, Via Cintia, 80126, Napoli

¹⁸Università degli Studi di Roma 'La Sapienza' and INFN, Piazzale Aldo Moro, 5 - 00185 Roma, Italy

¹⁹Faculty of Sciences, Mohammed V University, Rabat, Morocco.

²⁰Alma Mater Studiorum - Università di Bologna,

Dipartimento di Fisica e Astronomia, via Irnerio, 46 40126 Bologna, Italy and

²¹ASST Grande Ospedale Metropolitano Niguarda,

Piazza Ospedale Maggiore, 3 - 20162 Milano, Italy

The need of a fs-scale pulsed, high repetition rate, X-ray source for time resolved fine analysis of matter (spectroscopy and photon scattering) in the linear response regime is addressed by the conceptual design of a facility called MariX (Multi-disciplinary Advanced Research Infra-structure using X-rays) outperforming current X-ray sources for the declared scope. MariX is based on an original two-pass two-way superconducting Linac electron accelerator design equipped with an arc compressor to be operated in CW mode (1 MHz). MariX provides FEL emission in the range 0.2-8 keV with 10^8 photons per pulse ideally suited for photoelectric effect and inelastic X-ray scattering experiments. The accelerator complex includes an early stage that supports an advanced inverse Compton source of very high-flux hard X-rays of energies up to 180 keV that is well adapted for large area radiological imaging, realizing a broad science programme and serving a multidisciplinary user community, covering fundamental science of matter and applications to health sciences at pre-clinical and clinical level.

* Corresponding Author: Petrillo@mi.infn.it

Analytical Research Infrastructures (ARIs) based on electron accelerators are at the basis of Photon Science that describes the multidisciplinary implementation of fine analysis of matter, extending from the life sciences to materials science and physics. Currently two main types

of X-ray sources are supporting the ARIs: synchrotron radiation sources based on low-emittance electron storage rings and Free Electron Lasers based on linear electron accelerators (Linacs) and self-amplification of spontaneous emission (SASE). Pioneering FEL sources have been operated at Stanford University (LCLS) since 2010

[1] and at Spring-8 (SACLA) since 2011 [2], three X-ray FELs have recently started operation in Europe (EU-XFEL [3] and SwissFEL [4]) and in Korea (Pohang [5]) and novel constructions are underway worldwide: Shanghai [6], LCLS-II [7], MaRIE [8]. All these sources provide ultra-bright pulses of 10-100 fs duration with the intrinsic time jitter and intensity fluctuation from pulse to pulse determined by the SASE process. Two FEL emitting in the VUV-Soft-X rays are also operational in Europe, FLASH in Hamburg [9] and FERMI@Elettra in Trieste [10]. FERMI@Elettra is the only existing seeded FEL, i.e. the only FEL-type amplifier of a Ti:Sa seed pulse with negligible time jitter and minor pulse to pulse intensity fluctuations: it operates at up to 50 Hz. The FEL sources provide extremely brilliant pulses, exceeding by more than 9 orders of magnitude the peak brilliance of the fourth generation storage rings, and reaching more than 10^{12} photons per pulse of <100 fs duration. These flashes of UV and X-ray radiation can be used in experiments to probe matter in a highly excited state, dominated by non-linear response, or to probe before destroying individual objects, like macromolecules (proteins) ideally replacing crystallography with single object imaging. Pump and probe experiments are made possible by sequentially exciting with tunable optical or IR lasers and subsequently probing with the FEL pulse at finely tuned 10-100 fs-scale delays, or inverting the experiments by pumping with FEL X-rays and probing with ultra-short optical pulses from lasers or High Harmonic Generation (HHG) sources in the VUV. Up to now, much of the success of FEL-based experiments has been in the study of the internal structure or ordering of materials (solids, molecules, atoms). This is due to the inherent efficiency of those experiments, which are often compatible with single pulse detection. On the contrary spectroscopic probes, suitable to study magnetic and electronic structures, are more demanding in terms of average photon flux on the sample, and are thus harder to implement at low repetition rates.

Time resolution of 10-100 fs has emerged as a need of fine analysis also in spectroscopy, that, on the other hand, requires photon excitation density to remain instantaneously within the limit of linear response. The observation of the competition between transient configurations of excited matter (e.g. photo-excited by tunable fs laser pulses) can serve the understanding of the ground state of complex matter, like materials whose properties are driven by high electron correlation that is reflected in a spectrum of quasi-particle excitations, that determines the order parameters in matter like magnetism, ferroelectricity, superconductivity orbital order and more.

This study of transient and metastable states of matter can be ideally performed with ultra-short soft and hard X-ray pulses used to probe the electronic and magnetic structure after an initial pump has perturbed the ground state.

Currently this time domain is covered by fs laser optical spectroscopy as well as by photoelectric effect spec-

troscopy as excited by 10-100 fs laser driven HHG sources reaching energies of the order of 0.1 keV and repetition rates of several 100 kHz in the best cases. Further development of laser based sources is expected, but adequate intensities (number of photons per pulse) and repetition rates (number of pulses per second) can be realized today only by electron-accelerator based FELs.

Pump probe photoemission experiments of high scientific impact in atomic, molecular, nanoparticle and solid state physics ideally require a source of ultra-short photon pulses (order 10 fs) with about 10^8 photons/pulse to remain, according to photoionization cross sections, in the linear or near-linear response regime that allows spectroscopy to be interpreted within perturbative approaches, and repetition rates as high as possible (MHz range) for collecting adequate statistics in short times. MHz repetition rates are adequate to pump-probe experiments as ultra-short IR or tunable HHG pump sources can be employed to prepare the excited state and microsecond intervals between subsequent experiments are generally sufficient to reproduce the initial ground state of the sample.

Currently available FEL sources are far from being ideal for spectroscopy as the number of photons per pulse exceeds by 2-4 orders of magnitude that compatible with the linear response regime: severe attenuation of the pulses is therefore required for e.g. photoemission or X-ray absorption spectroscopy (XAS) and X-ray Magnetic circular dichroism (XMCD) experiments and this wastes an astounding fraction of the operating energy of the FEL. The warm Linacs are limited to few tens of Hz repetition rate, up to 100/120 Hz, which is definitely non ideal for collecting adequate statistics in high resolution spectroscopy. The EU-XFEL generates 2700 micropulses at 4.5 MHz in 10 macropulses per second: this is also non ideal as both attenuation is needed and the repetition rate of the micropulses is so high that it overruns the present capabilities of detectors and of possible pump-probe set-up operation. SASE fluctuations are severe limitation to spectroscopy with FELs at X-rays. True seeding, as successfully done by FERMI, should be ideally extended to X-ray energies.

There is clearly the scientific need of a novel type of source that would provide 10 fs pulses of 10^8 photons at 1-2 MHz, bridging between the most advanced SR and the current FEL sources. The former are aiming, in the future years, at few-ps pulses at up to 500 MHz (current pulses are in the few tens of ps range) i.e. $(5) \times 10^8$ pulses/s with typically $10^5 - 10^6$ photons/pulse; the latter are yielding 10-100 fs pulses at $10^1 - 10^4$ pulses/s with 10^{12} photons/pulse. This evident gap in timing resolution and average photon flux can be filled by the source proposed here, that has been conceived for this very scope.

HHG sources have been developed in laboratories as well as in pioneering user facilities, with 100 fs range pulses of 10^7 photons/pulse at some 10^5 pulses/s, but are currently limited at energies below 100 eV. Shorter, sub-fs

pulses are generated by HHG, but at kHz repetition rate at most. Higher photon energies have been demonstrated but currently with a low number of photons per pulse, which is unsuitable for fine analysis experiments.

Here we outline some elements of scientific case in advanced photon science, and the results issued from the conceptual design of an electron accelerator complex at the core of a novel facility called MariX (Multidisciplinary Advanced Research Infra-structure using X-rays). The MariX source will provide tailored ultra-short pulses of optimal intensity and repetition rate delivered to a multi-instrument suite (beamlines) for research in many diverse science domains and applications.

The MariX accelerator complex includes a two-pass FEL with arc compressor for high brilliance X-ray pulses and an advanced inverse Compton source of very high X-ray energy (up to 180 keV).

The desired pulse structure, intensity, repetition rate, reduced jitter and potential implementation of true seeding are addressed by this conceptual design study that has been carried out by a broad collaborative effort led by the Milan Section of INFN and Dipartimento di Fisica di Università di Milano, with contributions from Dipartimento di Fisica di Politecnico di Milano and other Universities and Research Institutes, in the framework of the design of a green-field new science campus in the outskirts of Milano. Besides tailoring the FEL and ICS sources for science, the environment of a science campus has also played a role in optimizing footprint and logistics obtaining an overall original configuration where all key operational buildings for the source services and experimental hall are located next to each other, thanks to the two-way operation of the superconducting Linac accelerator.

The design of the machine has been therefore conceptualized according to the following guidelines: a) the overall footprint of the infrastructure has been minimized. b) The performances of the source have been optimized in terms of versatility, operational easiness, quality of the radiation. c) The resulting X-ray source is filling a science gap that is not addressed by the existing or planned photon sources. d) The proposed technologies and techniques are within the limits of the state of the art or just beyond it, in order to balance risks and competitiveness.

Hereafter we first describe the machine footprint. Then, we will discuss the nominal parameters. Final comments will be presented in the conclusions.

I. MACHINE LAYOUT

MariX is a multi-purpose infrastructure constituted by two different X-ray sources exploiting different sections of the accelerator chain - an Inverse Compton Scattering source (ICS) and a Free-Electron Laser (FEL) - with properties that contribute to define the next generation X-ray sources tailored to spectroscopy and imaging. Ultrabright, coherent ultrashort photon pulses of energy

between 200 eV to 8 keV will be produced by the FEL at 1-2 MHz, and intense X-ray beams of energy up to 180 keV will be generated by the ICS section at up to 100 MHz. The compactness of the design of accelerator and undulators (less than 500 m) reduces greatly the footprint of the complex for the benefit of integration in highly urbanized areas or university campuses. On the contrary the X-ray FEL accelerators in operation (e.g. EuXFEL [3]) or under construction (e.g. LCLS-II [7]) are few km long, with key services and experimental halls at the opposite ends. Most operational FELs are injected by warm temperature Linacs and support at maximum 100 Hz operation. Ultrahigh flux and compact construction in our design are consequent to the use of Super-Conducting Linear Accelerators (SC-Linacs) supporting the Continuous-Wave mode (CW) for delivering high brightness FEL-grade electron beams. By exploiting the specific capability of the SC Radiofrequency cavities of accelerating in both directions, the electron beam can double its energy after being re-injected into the accelerator itself. The innovative MariX layout is illustrated in Figure 1.

The early electron beam acceleration section of MariX includes an energy recovery scheme based on a modified folded push-pull CW-SC twin Linac ensemble (ERL1 and ERL2). The system allows to sustain MW-class beam power with just about one hundred kW active power dissipation/consumption and is exploited for a Bright and Compact X-ray Source (BriXS). The two CW 100 MHz 100 MeV electron beams are delivered at the collision points of ICS, for scattering the photons of optical laser pulses in two specular Fabry-Pérot cavities (marked as FP1 and FP2 in the bottom part of Figure 1). While feeding hard X-ray beamlines for imaging, BriXS constitutes the injector for the downstream FEL.

The second block of MariX accelerator complex is the two-pass two-way Linac (Linac1 in Figure 1) equipped with an arc compressor (AC) [12, 13] similar to a conventional Double Bending Achromat (DBA) magnetic lattice of a storage ring (e.g. Elettra-like [11]). The arc compressor is composed by 14 DBAs, 10 with positive and 4 with negative curvature radius for a smooth matching to the Linac. It is indeed able to re-inject the electron beam leaving the Linac after being accelerated once, so to get boosted twice in energy in the second pass, being the first pass left-to-right (referring to the position of the elements of the line in Figure 1) and the second pass right-to-left. At the same time, the dispersive strength of the ring, combined with a suitable electron energy longitudinal chirp, permits the arc to act as compressor with compression factors of the order of 100, thus preparing an ultra-short and high-current electron beam suitable for FEL operation. The FEL electron beam, after a second short Linac (Linac2, at the left side of Figure 1) devoted to fine tuning of the energy, reaches a maximum 3.8 GeV energy, therefore allowing the FEL to radiate up to 8 keV actually operating only a 1.5 GeV Linac (that also includes the BriXS ERL delivering the initial 0.1 GeV injection

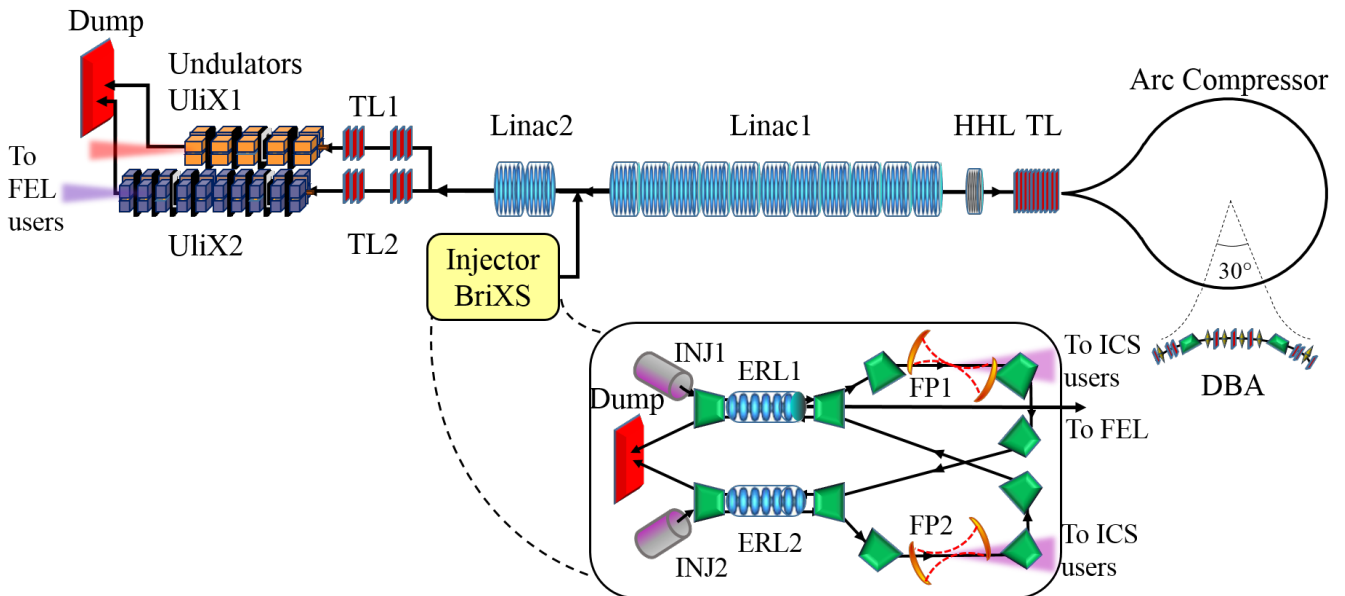


Figure 1: Conceptual lay-out for MariX, based on a two-pass CW Super-Conducting CW GeV-class Linac driven by a folded push-pull Energy Recovery 100 MeV Linac.

energy). A high harmonic cavity and a dedicated transfer line are placed between Linac1 and the arc for chirping and optimizing the matching of the electron beam to the compressor. The undulators UliX1 (with period $\lambda_w = 2.8$ cm, generating radiation from 200 eV to 4 keV) and UliX2 ($\lambda_w = 1.2$ cm, delivering 2-8 keV) with their matching lines close the device. An important characteristics of the device is that the FEL and ICS experimental halls are contiguous permitting a possible mutual interaction. Figure 2 gives an artistic rendering (upper window: projected view, bottom window: perspective view) of the buildings hosting the infrastructure.

II. EXPECTED PERFORMANCES

The nominal beam parameters and the expected radiation characteristics of ICS are summarized respectively in Tables I and II.

These results have been obtained by start-to-end simulations made with a chain of codes: Astra [14] and T-step [15] for the injector, Elegant [16] for the Linacs and passive lines, CAIN [17] for the ICS.

The concept of the ICS high-flux Compton Source is to enable advanced radiological imaging applications to be conducted with mono-chromatic X-rays. These applications range from higher sensitivity in mammography to higher contrast in edge enhancement base radio-imaging with phase contrast, to selective radio-therapy with Auger electrons triggered inside tumoral cells by mono-chromatic photon beams, and are made possible only when the flux of ICS source reaches 10^{13} photons/s as foreseen in MariX/BriXS, with an expected bandwidth

of 1-10% (see Table II). Figure 3 presents the collimated spectrum of the Compton radiation produced in one interaction between laser and electron beam with parameters as those listed in Table I. Cases relevant to different collimation angles and bandwidths are presented.

Beam nominal values and radiation characteristics for the MariX FEL are summarized respectively in Tables III and IV. The FEL source is tailored for time-resolved spectroscopies with coherent X-rays providing individual pulses not exceeding the linear response regime and space charge effects. This implies 10^8 photons per 10 fs-long pulses at most which is 3-4 orders of magnitude lower than the individual peak intensity of the current X-FELs. The 4-5 orders of magnitude gain in repetition rate allowed by MariX, e.g at 1-2 MHz, restores the high flux per second of the most advanced synchrotron sources, whilst having ultrashort pulses suitable for time resolved pump-probe methods in optical, photoelectric effect and inelastic X scattering experiments. With the current FEL technology, a $10^3 - 10^4$ attenuation of X-ray beams must be applied (as at e.g. SACLA), in order to measure an undistorted, non energy shifted core level spectrum. The statistics of these measurements is limited, by the 30-50 Hz operation, to a 10^5 lower time integrated flux per second with respect to MariX. High longitudinal coherence will enable pump-probe methods at 10-100 fs accuracy and with high statistics.

In the range of wavelengths between 2 and 5 Å, MariX provides either $10^{10} - 10^{11}$ photons per shot with a repetition rate of 1 MHz in SASE mode or $10^9 - 10^{10}$ photons per shot in the single spike SASE mode. These estimations, that do not take into account degradations due to errors, misalignments, jitters, exceed by one or

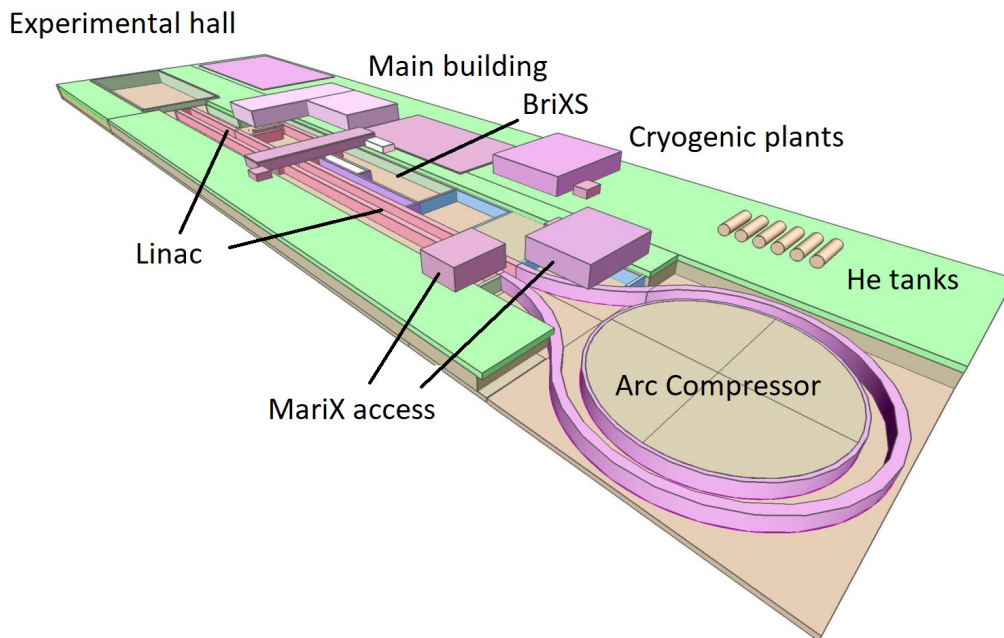
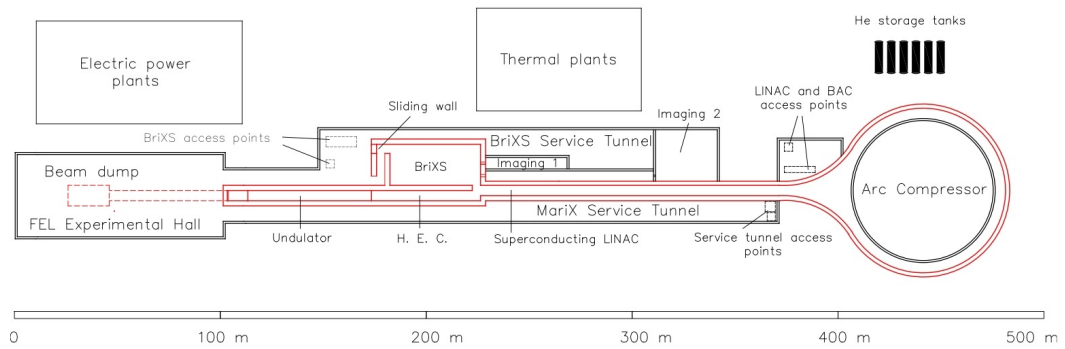


Figure 2: Schematic representation of the buildings hosting the infrastructure. Upper window: projected view, bottom window: perspective view.

Table I: Electron beam and laser of BriXS

Electron beam energy	MeV	100	Laser pulse energy	mJ	7.5
Bunch charge	pC	200	Laser wavelength	nm	1030
Normalized emittance	mm mrad	1.2	Laser pulse length	ps	2
Relative energy spread	%	1.6	Laser spot size, x	μm	40
Bunch length	μm	400	Laser spot size, y	μm	80
Focal spot size	μm	20.	Collision angle	deg	7

Table II: BriXS radiation characteristics, $\$ = \text{Photons/s/mm}^2/\text{mrad}^2/\text{bw}(\%)$.

Photon energy	keV	20-180	FWHM photon spot size z=100 m	cm	4-40
Bandwidth (bw)	%	1-10	Peak brilliance	$\$$	$10^{18} - 10^{19}$
Photon/shot within FWHM bw	10^5	0.05-1	Radiation pulse length	ps	0.7-1.5
Photon/s within FWHM bw	10^{13}	0.05-1	Linear/Circular polarization	%	99
Source size	μm	20	Repetition rate	MHz	100
Source divergence	mrad	1-6	Pulse-to -pulse separation	ns	10

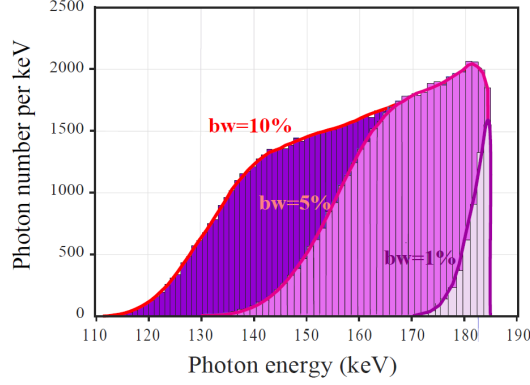
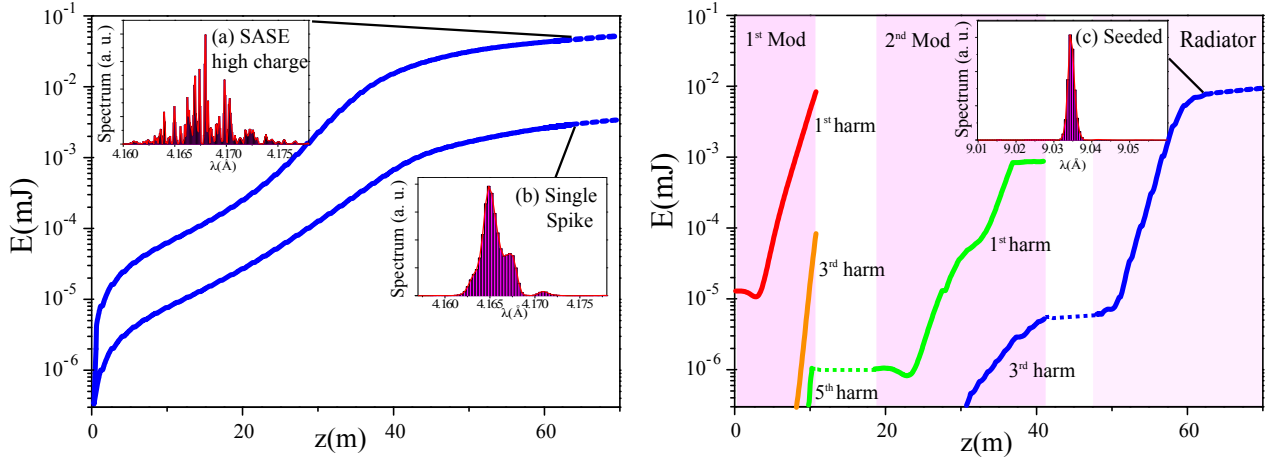


Figure 3: Inverse Compton Scattering spectra. Photon yield as function of the photon energy. Collimation angles respectively 0.6, 2.1, 3.3 mrad for increasing bandwidths.

Table III: Electron beam and undulator for MariX FEL.

electron beam energy	GeV	1.6-3.8	relative energy spread	10^{-4}	4-2
Charge	pC	8-50	pulse duration	fs	2.5-16
Current	kA	1.5-1.8	Undulator period	cm	1.2-2.8
normalized emittance	mm mrad	0.4-0.6	Undulator length	m	30-60

Figure 4: FEL radiation energy vs undulator position and spectra (in the boxes) extracted at 60 m. Left window: (a) SASE case obtained in UliX2 with $Q=50$ pC. (b) SASE single spike, same parameters as (a), but $Q=8$ pC. Right window: (c) Seeded cascaded fresh-bunch case. First modulator (1st Mod) with 5 cm period. Second modulator (2nd Mod) with 2.8 cm period. Radiator with 1.2 cm period. The FEL simulations have been performed with GENESIS 1.3 [18].

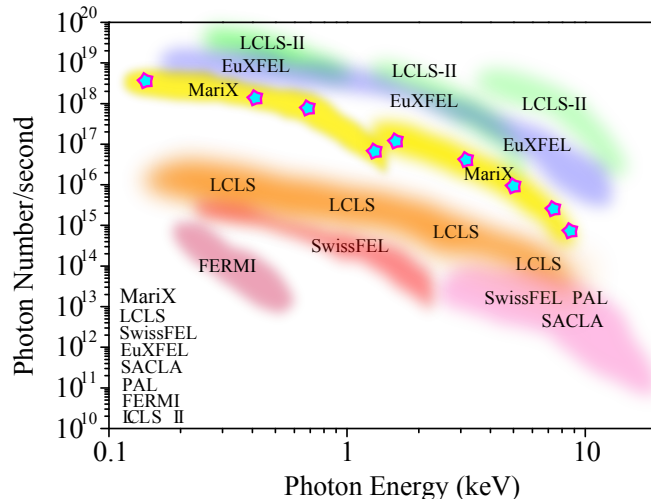


Figure 5: The expected performances of MariX Free Electron Laser (yellow area), in terms of photon flux as a function of the photon energy in the 0.2-8 keV anticipated dynamic range, showing performances above present FELs driven by normal conducting Linacs, second only to the anticipated performances of LCLS-II and EuXFEL.

Table IV: MariX FEL characteristics, $\$ = \text{Photons/s/mm}^2/\text{mrad}^2/\text{bw}(\%)$.

Undulator		UliX1	UliX2
Photon energy	keV	0.12-1.5	1.5-8
Radiation wavelength	Å	100-8	8-1.5
Photon/shot	10^{11}	17-1.2	2.4-0.025
Bandwidth	0.1%	2.1-0.7	2.3-3
Pulse length	fs	3-10	1-7
Pulse divergence	μrad	6-50	16-45
Photon/s	10^{17}	17-1.2	2.4-0.025
Average brilliance	10^{23} §	0.86-14	3.5-0.37

more orders of magnitude the target values set by the scientific case. MariX will be therefore capable to satisfy the requested FEL photon beam parameters expected by the envisaged experiments, considering also a safety margin dealing with the losses in delivering the photon beams to experimental hutch. A further innovation is a truly coherent photon beam at 100 KHz, that can be obtained with the cascaded High Gain Harmonics Generation (HG) fresh bunch technique [20]. This option will actually benefit precision timing measurements as the SASE intrinsic pulse-to-pulse jitter will be substantially eliminated, as well as the reduced pulse-to-pulse intensity fluctuations, thus approaching, at X-ray energies, the unique performance of FERMI@Elettra. Typical FEL spectra for linear spectroscopy applications are presented in Fig. 4. Case (a) has been obtained with UliX2 and the largest possible charge (50 pC) at 4.17 Å

and presents SASE spectral fluctuations. Case (b) is an example of SASE single spike mode [19], with improved coherence, obtained in the same condition as case (a), but with lower charge 8 pC. True coherence and pulse stability can be achieved with a segmented undulator, by means of cascaded fresh-bunch seeding technique. The seed is 12 nJ at 13.7 nm radiation and can be generated by HHG in gas [21] or with a dedicated FEL oscillator [22]. In the example shown in Figure 4 (case c), performed at $\lambda = 9$ Å, three undulator modules (with periods respectively 5 cm, 2.8 cm and 1.2 cm) are foreseen.

Such source will fill in the XAS/XMCD (with polarization control from quarterwavelength blades or undulators) and bulk photoemission to become highly efficient probes of matter at the nanoscale but in bulk environments, like buried interfaces of interest in materials science, in-vivo biological samples or catalysers at work. The novel source will therefore create absolutely novel conditions for experiments that cannot be performed satisfactorily at the present and foreseen sources based on storage rings or SASE-FEL. The anticipated performances of MariX Free Electron Laser are well beyond the state of the art of presently FELs in operation, and in the trailing edge of EuXFEL and of the US future superconducting FEL project of reference (LCLS-II) as illustrated in Figure 5.

III. CONCLUSIONS

A new generation accelerator complex is at the core of the MariX facility dedicated and optimized to ultrafast

coherent-X-ray spectroscopy and inelastic photon scattering, and to highly penetrating X-ray imaging of mesoscopic and macroscopic samples. Such facility will be intrinsically multi-user and multidisciplinary as of the research performed and science output.

Acknowledgments

Useful comments by M. Altarelli, A. Gallo, A. Ghigo, L. Giannessi, J. Hastings and A. Variola are gratefully

acknowledged.

-
- [1] P. Emma, R. Akre, et al., 'First lasing and operation of an ångstrom-wavelength free-electron laser' *Nature Photonics*, 4, 641 (2010).
- [2] D. Pile, 'First light from SACLA' *Nature Photonics*, 5, 456 (2011).
- [3] M. L. Grünbein, J. Bielecki, et al., 'Megahertz data collection from protein microcrystals at an X-ray free-electron laser' *Nature Communications*, 9, 3487 (2018).
- [4] <https://www.fels-of-europe.eu/e212752/e214604/e283906>.
- [5] In Soo Ko, Heung-Sik Kang et al., 'Construction and commissioning of PAL-XFEL facility' *Applied Sciences* 7(5), 479 (2017), H.S. Kang et al., 'Hard X-ray FEL Lasing Through BBA and Radiation Spectrum Analysis'. *Proc. of International Particle Accelerator Conference (IPAC'17)*. JACoW. 2017.
- [6] D. Wang and SXFEL team, 'Soft X-Ray Free-Electron Laser at SINAP', *Proceedings of IPAC2016*, Busan, Korea, TUZA01.
- [7] T. Raubenheimer, 'LCLS-II-HE FEL Facility Overview' https://portal.slac.stanford.edu/sites/conf_public/lclsiihe2016/Documents/160926%20LCLS-II-HE%20Raubenheimer.pdf. 2016.
- [8] <https://www.lanl.gov/science-innovation/science-facilities/marie/index.php>
- [9] B. Faatz, S. Schreiber et al., 'First Lasing of FLASH2 at DESY' *Synchrotron Radiation News*, 27(6) (2014).
- [10] E. Allaria, R. Appio et al., 'Highly coherent and stable pulses from the FERMI seeded free-electron laser in the extreme ultraviolet' *Nature Photonics*, 6, 699 (2012).
- [11] <https://www.elettra.trieste.it/lightsources/elettra>.
- [12] S. Di Mitri and M. Cornacchia, 'Transverse emittance-preserving arc compressor for highbrightness electron beam-based light sources and colliders' *EPL Europhysics Letters*, 109, 62002 (2015). S. Di Mitri, 'Feasibility study of a periodic arc compressor in the presence of coherent synchrotron radiation' *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment* 806, 184 (2016).
- [13] M. Placidi et al., 'Compact FEL-driven inverse Compton scattering gamma-ray source' *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment* 855, 55–60 (2017).
- [14] K. Floettmann. ASTRA: A space charge tracking algorithm. URL: <http://www.desy.de/~mpyflo/>.
- [15] L.M. Young and J. Billen. PARMELA-code. Tech. rep. LA-UR-96-1835, Revised May 4, 1998.
- [16] M. Borland et al., 'Elegant. Tech. rep. LS-287', ANL, Argonne, IL, 2000.
- [17] P. Chen et al., 'CAIN: Conglomerat d'ABEL et d'Interactions Non-lineaires' *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment* 355, 107 (1995).
- [18] S. Reiche, 'GENESIS 1.3: a fully 3D time-dependent FEL simulation code' *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment* 429, 243 (1999).
- [19] J. Rosenzweig et al., *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment*, 593, 39 (2008).
- [20] I. Ben-Zvi, K. M. Yang, L.H.Yu, 'The fresh-bunch technique in FELS' *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment* 318, 726 (1992)
- [21] E.J.Takahashi et al., *IEEE Journal Of Selected Topics In Quantum Electronics*, Vol. 10, No. 6, G Lambert et al., *New Journal of Physics* 11, 083033 (2009)
- [22] G. Dattoli, E. Di Palma, A. Petralia, 'Free electron laser oscillator efficiency', *Optics Communications* 425, 29 (2018). A.Kai Li, Jiawei Yan, Chao Feng, Meng Zhang, and Haixiao Deng 'High brightness fully coherent X-ray amplifier seeded by a free-electron laser oscillator' *Phys. Rev. Accel. Beams* 21, 040702